




Square expanded meshes

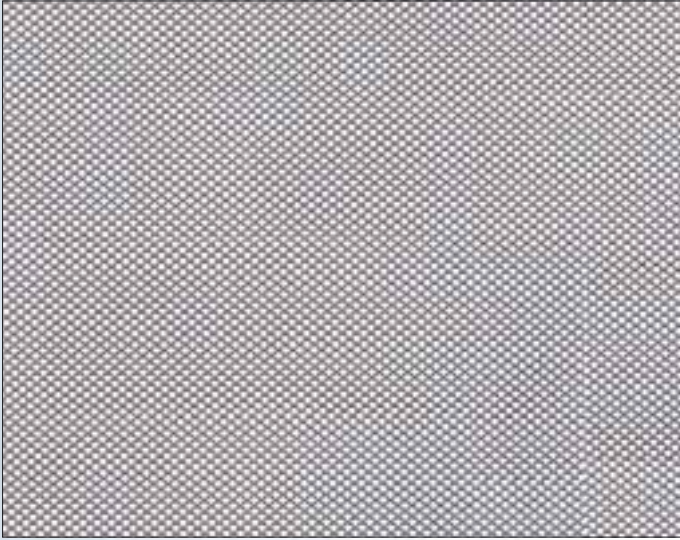


Q 2

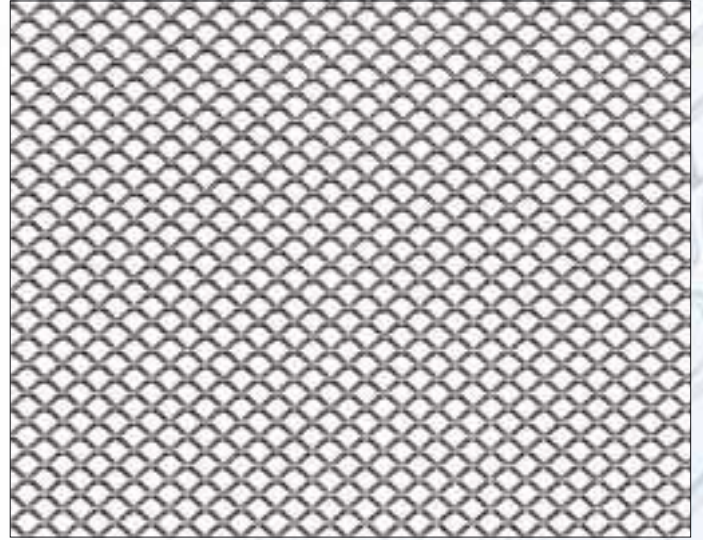


Q 5

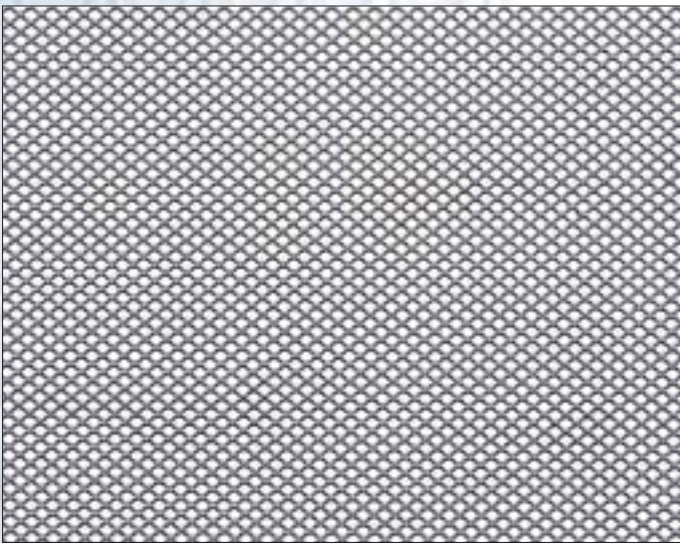


Q 3

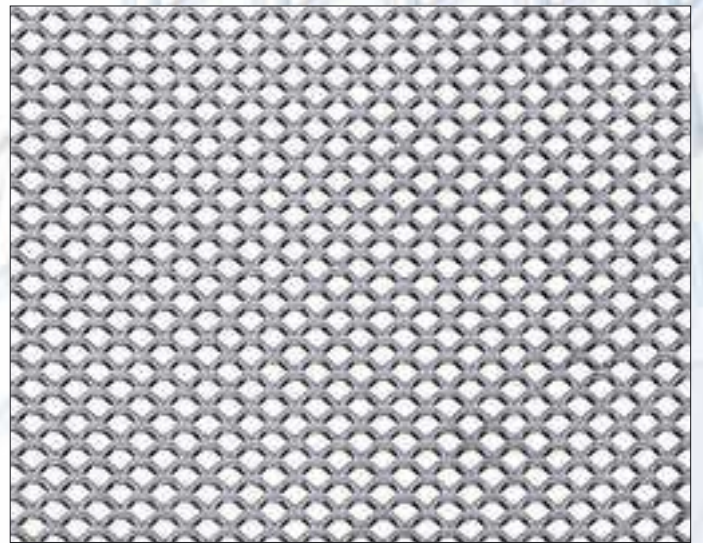


Q 6

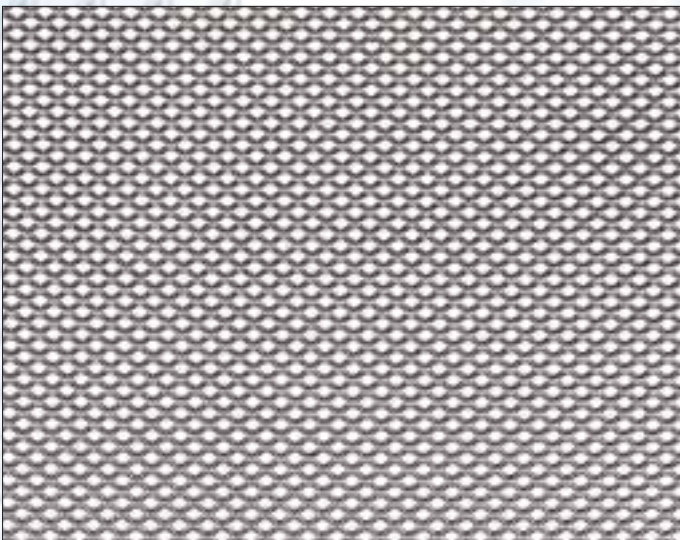


Q 4

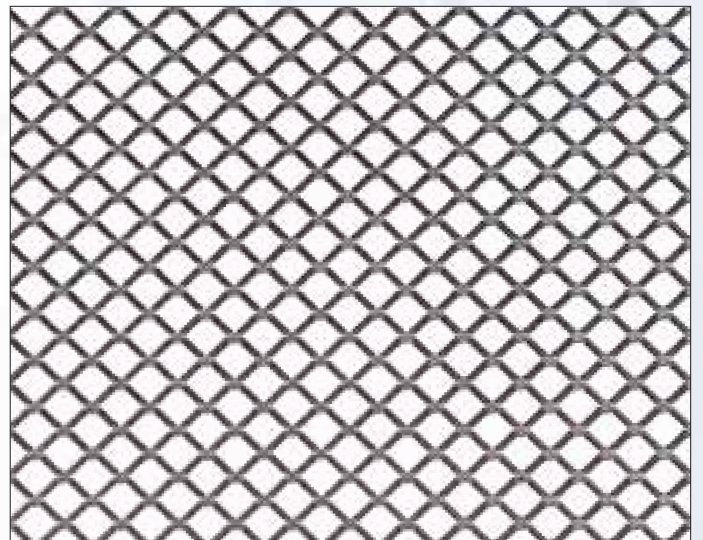

Q 8

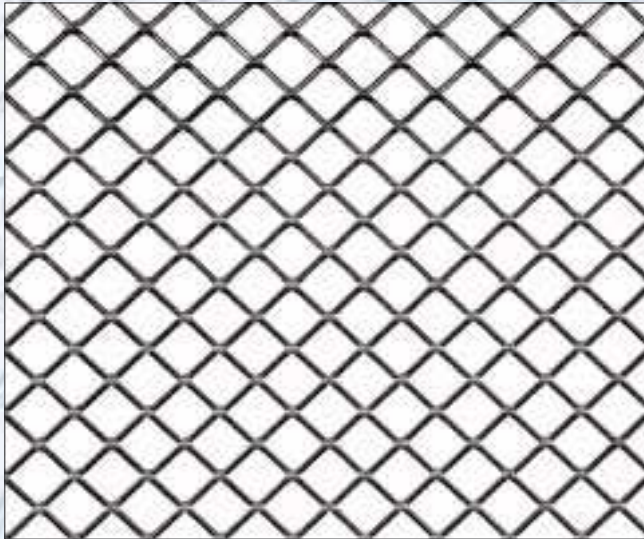

Q 10

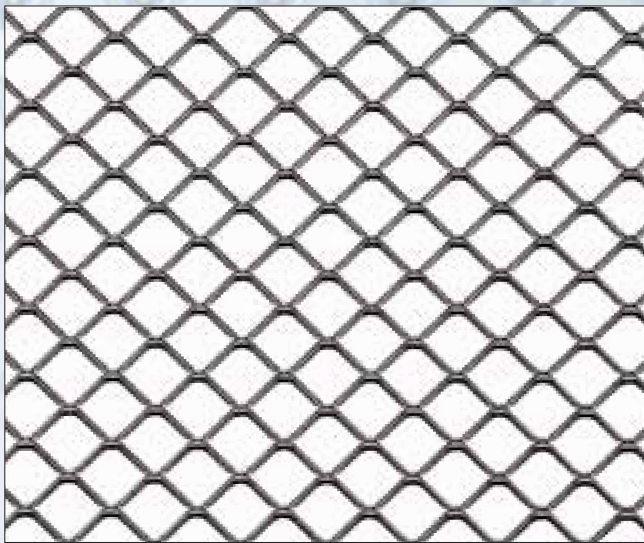

Q 12

Mesh produced in all materials, in rolls or sheets, standard or personalised thickness and shapes.



The most popular strand thickness sizes are shown.

The weights given are approximate only, depending on the material chosen and the short way of the mesh.


The Kg per m² figure applies to mild steel or stainless steel material.

Meshes shown life-size, but please allow for photo tolerances.


DL mm	DC mm	L mm (~)	Strand width av/mm	Strand thickness sp/mm	Weight kg/m ²	Maximum width of sheet/coil mm
Q 2	1,60	0,9 x 0,9	0,30	0,30	0,900	1000
	1,60	0,9 x 0,9	0,40	0,40	1,600	1000
	1,60	0,9 x 0,9	0,40	0,50	2,000	1000
Q 3	2,20	1,5 x 1,5	0,35	0,30	0,650	1000
	2,20	1,5 x 1,5	0,40	0,40	1,150	1000 - 1250
	2,20	1,5 x 1,5	0,50	0,50	1,800	1000 - 1250
Q 4	3,00	2,0 x 2,0	0,40	0,40	0,850	1000 - 1250
	3,00	2,0 x 2,0	0,50	0,50	1,350	1000 - 1250
	3,00	2,0 x 2,0	0,60	0,60	1,900	1000 - 1250
Q 5	4,00	2,5 x 2,5	0,50	0,50	1,000	1000 - 1250
	4,00	2,5 x 2,5	0,60	0,60	1,450	1000 - 1250
	4,00	2,5 x 2,5	0,80	0,80	2,550	1000 - 1250
Q 6	4,50	3,0 x 3,0	0,50	0,50	0,900	1000 - 1250
	4,50	3,0 x 3,0	0,60	0,60	1,300	1000 - 1250
	4,50	3,0 x 3,0	0,80	0,80	2,250	1000 - 1250
Q 8	6,00	4,0 x 4,0	0,60	0,60	0,950	1000 - 1250
	6,00	4,0 x 4,0	0,80	0,80	1,700	1000 - 1250
	6,00	4,0 x 4,0	1,00	1,00	2,650	1000 - 1250
Q 10	8,00	5,0 x 5,0	0,60	0,60	0,700	1000 - 1250
	8,00	5,0 x 5,0	0,80	0,80	1,300	1000 - 1250
	8,00	5,0 x 5,0	1,00	1,00	2,000	1000 - 1250
Q 12	9,50	6,0 x 6,0	0,80	0,80	1,100	1000 - 1250
	9,50	6,0 x 6,0	1,00	1,00	1,700	1000 - 1250
	9,50	6,0 x 6,0	1,50	1,50	3,750	1000 - 1250

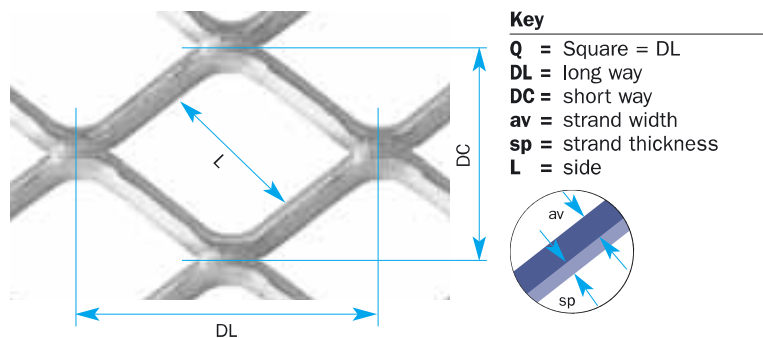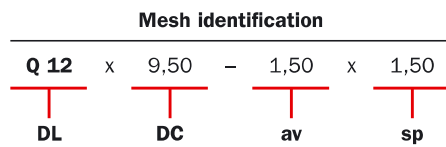


Square expanded meshes

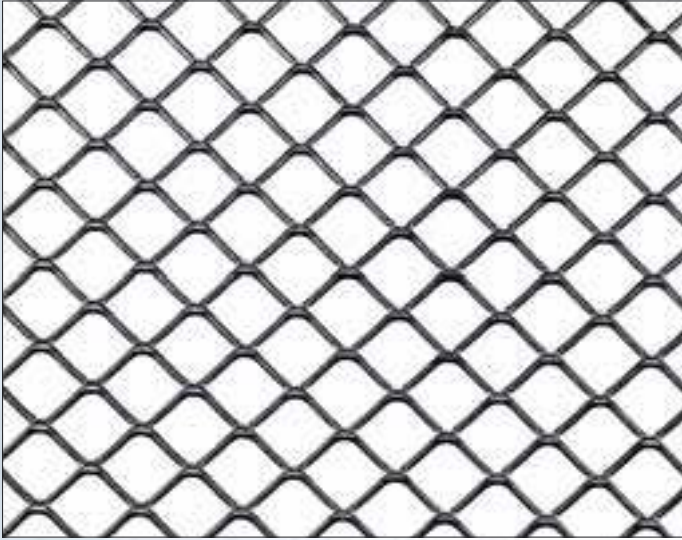


Q 14

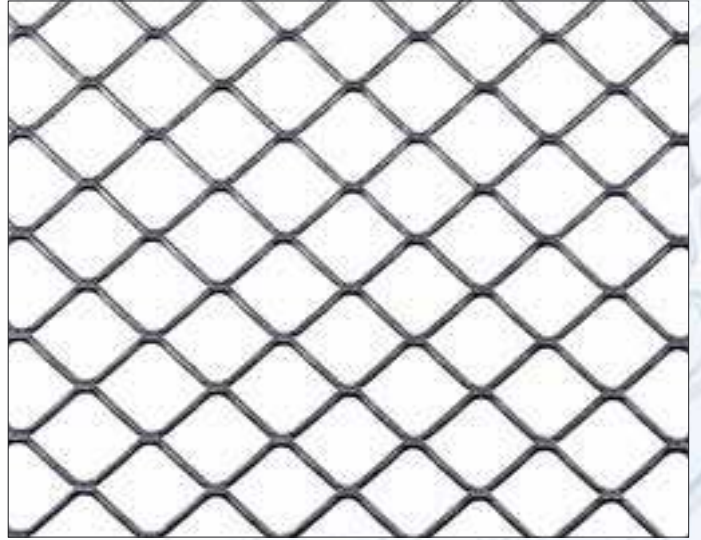

Q 18

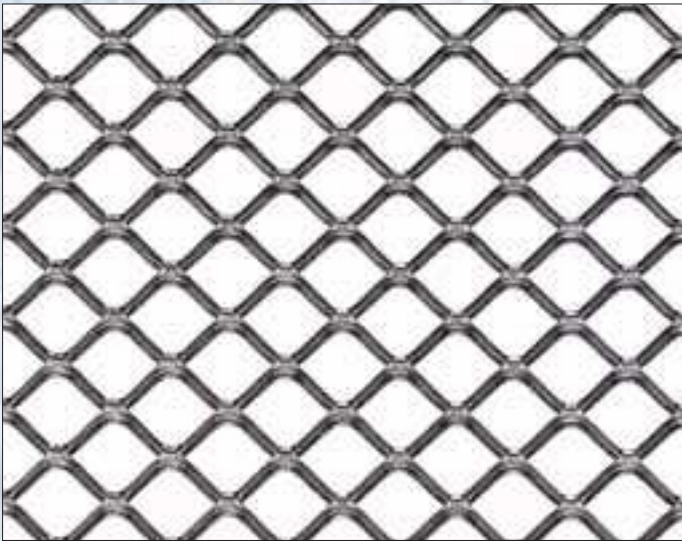


Q 16

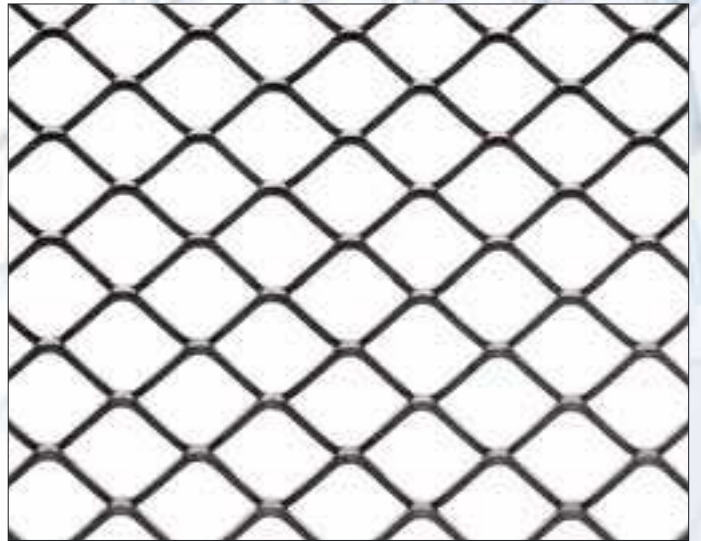

Q 20



Q 25

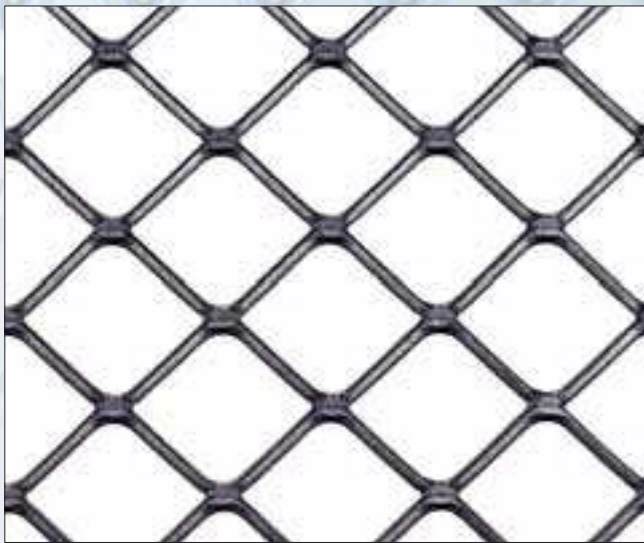

Q 30

DL mm	DC mm	L mm (~)	Strand width av/mm	Strand thickness sp/mm	Weight kg/m ²	Maximum width of sheet/coil mm
Q 14	11,00	7,0 x 7,0	0,80	0,80	0,950	1000 - 1250 - 1500
	11,00	7,0 x 7,0	1,00	1,00	1,450	1000 - 1250 - 1500
	11,00	7,0 x 7,0	1,50	1,50	3,250	1000 - 1250 - 1500
Q 16	12,00	8,0 x 8,0	1,00	1,00	1,350	1000 - 1250 - 1500
	12,00	8,0 x 8,0	1,50	1,00	2,000	1000 - 1250 - 1500
	12,00	8,0 x 8,0	1,50	1,50	3,000	1000 - 1250 - 1500
Q 18	13,00	9,0 x 9,0	1,00	1,00	1,250	1000 - 1250 - 1500
	13,00	9,0 x 9,0	1,50	1,00	1,850	1000 - 1250 - 1500
	13,00	9,0 x 9,0	1,50	1,50	2,750	1000 - 1250 - 1500
Q 20	15,00	10,0 x 10,0	1,00	1,00	1,050	1000 - 1250 - 1500
	15,00	10,0 x 10,0	1,50	1,00	1,600	1000 - 1250 - 1500
	15,00	10,0 x 10,0	1,50	1,50	2,400	1000 - 1250 - 1500
Q 25	19,00	13,0 x 13,0	1,00	1,00	0,850	1000 - 1250 - 1500
	19,00	13,0 x 13,0	1,50	1,50	1,900	1000 - 1250 - 1500
	19,00	13,0 x 13,0	2,00	2,00	3,350	1000 - 1250 - 1500
Q 30	23,00	16,0 x 16,0	1,00	1,00	0,750	1000 - 1250 - 1500
	23,00	16,0 x 16,0	1,50	1,50	1,550	1000 - 1250 - 1500
	23,00	16,0 x 16,0	2,00	2,00	2,750	1000 - 1250 - 1500



Mesh produced in all materials, in rolls or sheets, standard or personalised thickness and shapes.

The most popular strand thickness sizes are shown.

The weights given are approximate only, depending on the material chosen and the short way of the mesh.

The Kg per m² figure applies to mild steel or stainless steel material.

Meshes shown life-size, but please allow for photo tolerances.

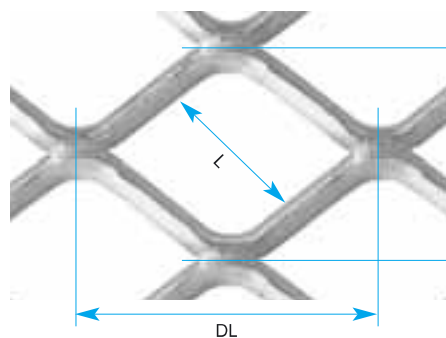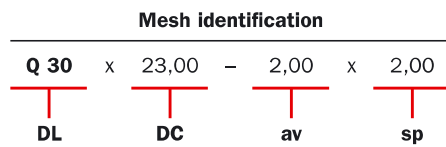

Key
Q = Square = DL
DL = long way
DC = short way
av = strand width
sp = strand thickness
L = side

